



# TR-SDI & TRI-10

## Remote Indicator panel

- **Up to 10 alarm zone repetitions**


**TR-SDI & TRI-10** are Repeater Panels of General Indications designed to be connected with **FDS (Fire Detection System)**.

Both **TR-SDI** and **TRI-10** repeat main information like **“power”** and **“fire alarm”** coming from FDS. Repeater panels carry out the signalization by the means of **leds** and **acoustic signal**. Possibility is given to carry out **“test led”** and **“silence buzzer”**.

**TR-SDI** and **TRI-10** collect the alarm information from FDS by the means of **relay contact outputs**.

**TR-SDI** is dedicated for the repetition of **“general fire alarm”** and **“general fault”** of an FDS and **TRI-10** is dedicated for the repetition of **“fire alarm of zones” (max. 10)**.

These repeater panels need 24V external power supply and they can be connected in cascade.

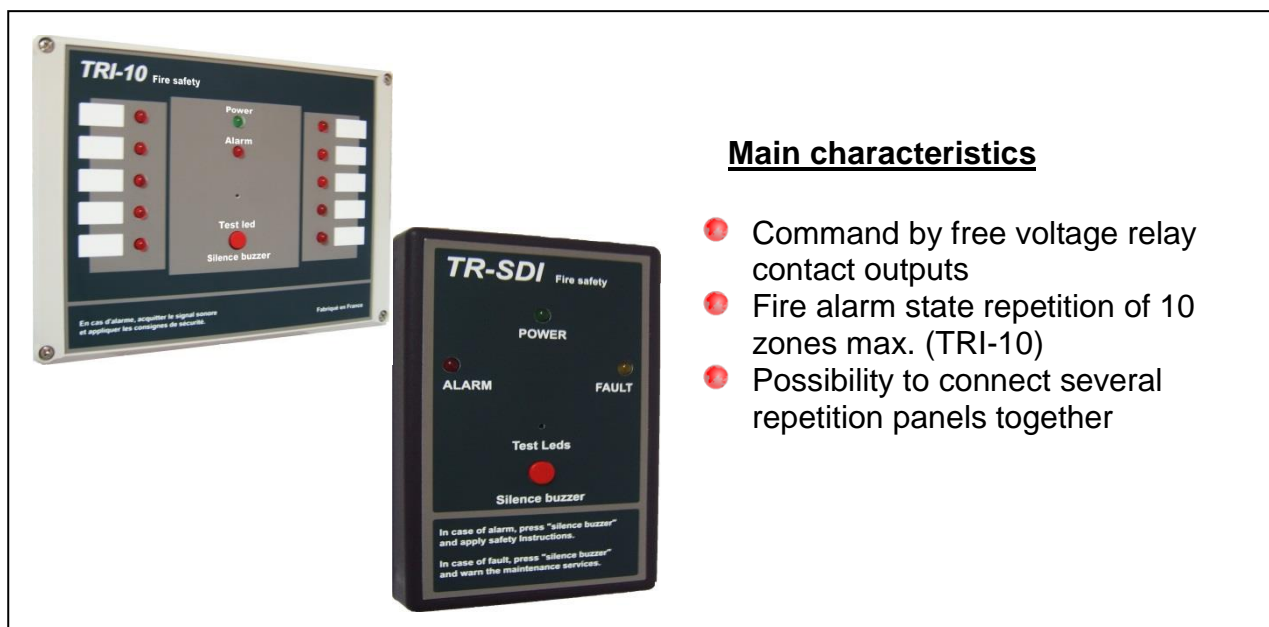

### Main characteristics


- Command by free voltage relay contact outputs
- Fire alarm state repetition of 10 zones max. (TRI-10)
- Possibility to connect several repetition panels together

| <b>General</b>                    |                            |                 |
|-----------------------------------|----------------------------|-----------------|
|                                   | TR-SDI                     | TRI-10          |
| Repetition of general fire alarm  | 1                          | 1               |
| Repetition of general fault       | 1                          | 0               |
| Repetition of fire alarm of zone  | 0                          | 10              |
| <b>Electrical specification</b>   |                            |                 |
| Operating voltage                 | 24Vdc                      |                 |
| wiring                            | 1.5mm <sup>2</sup> maximum |                 |
| <b>Mechanical characteristics</b> |                            |                 |
| Dimensions (L x W x D)            | 150x95x37 (mm)             | 200x150x37 (mm) |
| <b>Climatic characteristics</b>   |                            |                 |
| Storage temperature               | +10°C to +40°C             | +10°C to +40°C  |
| Storage humidity                  | < 85%                      | < 85%           |



# TR-SDI & TRI-10

## Remote Indicator panel

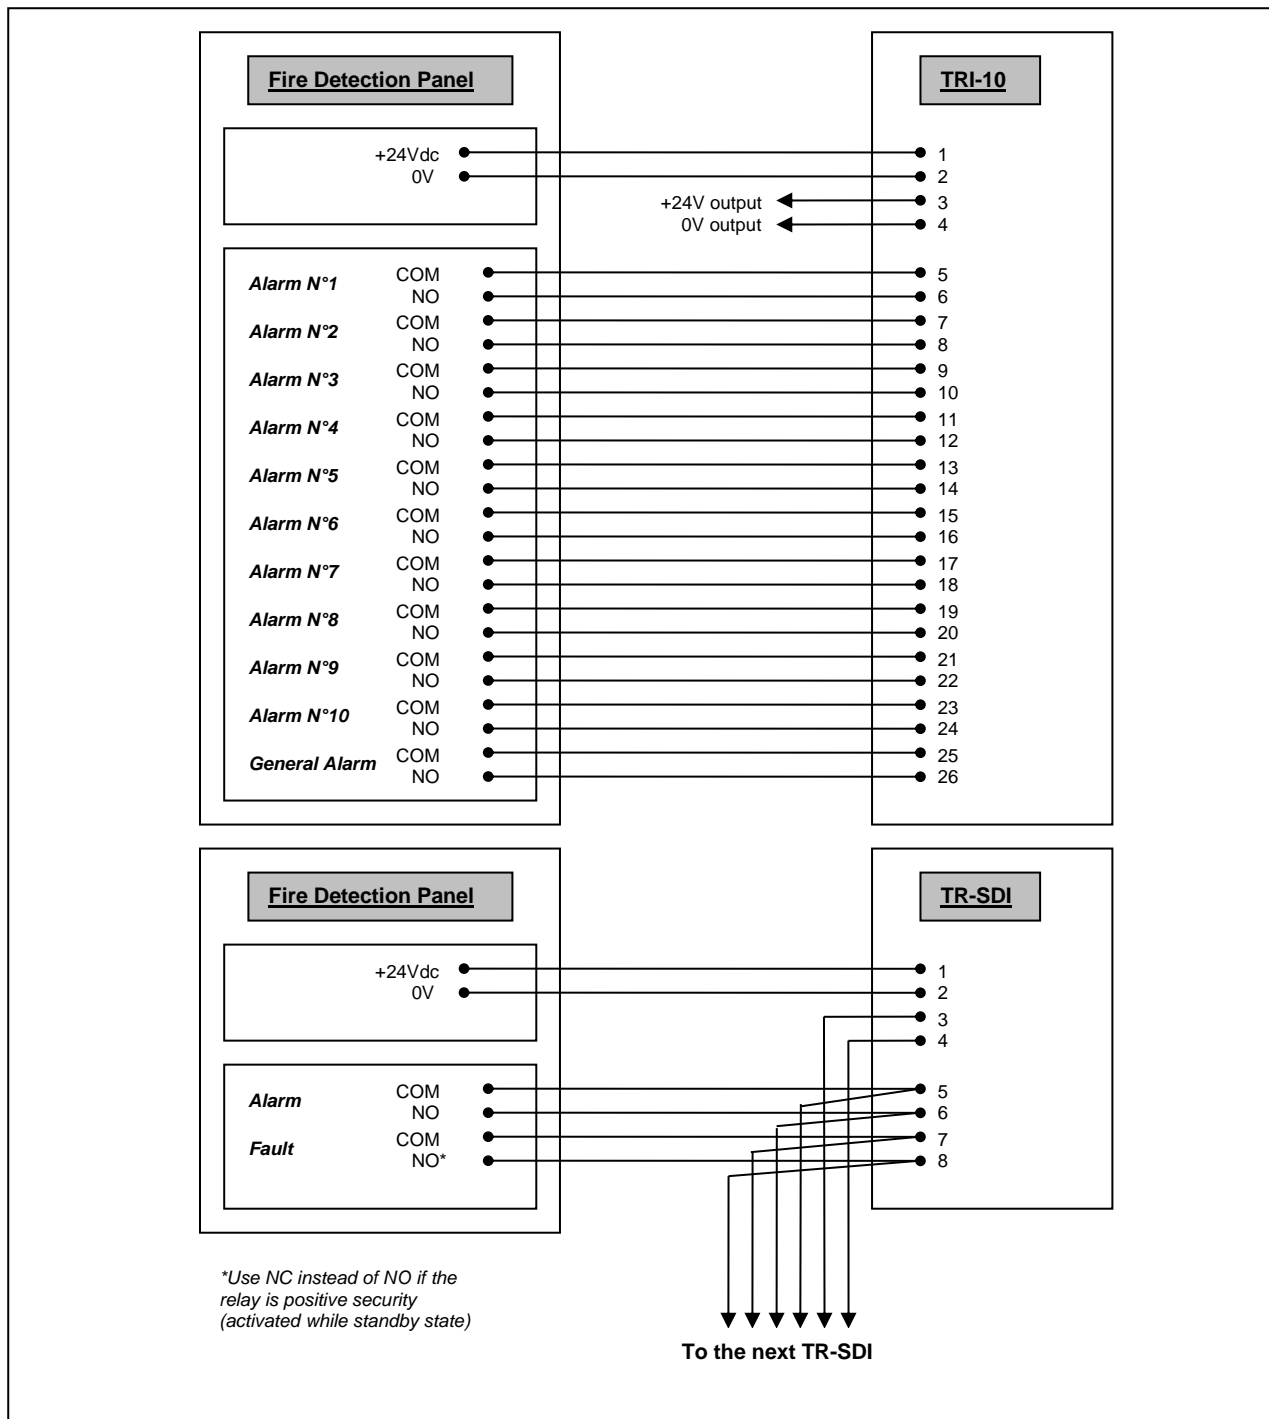

**REFERENCE**  
 TR-SDI  
 TRI-10

**DESCRIPTION**  
 Remote indicator panel  
 Remote 10 alarm zones indicator panel



Non contractual document

DETECTOMAT INTERNATIONAL  
 41 rue du saule trapu, ZA du moulin de Massy  
 91300 MASSY (France)

Tel : +33 (0)1 60 13 67 24  
 Fax : +33 (0)1 60 13 67 26  
 e-mail : sales@detectomat-int.com