

## **Stand alone VACIE**

• VULCA VOICE: Stand alone VACIE

**VULCA VOICE** is a range of compact standalone EN54-16 and EN54-4 certified Voice Alarm System, including batteries and charges.

In addition to Voice Alarm functionalities, numerous interfaces allow to meet all types of Public Address applications.

SD memory card associated with digital player makes it possible to easily customize your messages and set diffusion as a playlist or individually

Implementation is simple thanks to small depth dimensions, full integration of equipments and adapted interfaces; GX3016 consoles can be connected through simple Cat5 cable.



## Main characteristics

- 2 AUX inputs
- 1 microphone consoles bus
- 1 message data base
- From 1 to 4 loudspeaker lines
- 400W max. per box / 300W max. per line
- Integrated UPS

Electrical charactheristics				
	VULCA VOICE			
Inputs	4 MIC/LINE -30 dBm / 0 dBm			
Loudspeaker lines	Up to 4; 100V 300W max. per line			
Frequency band (± 3bB)	50 Hz ÷ 20 KHz			
Distortion	< 1%			
THD + N	> 70 dB			
Interfaces	USB; EHT IP (Remote maintenance)			
Power supply	230 Vca – 920 VA max. Batteries 2x12V –38 Ah			
Dimensions (LxDxH)	520 x 530 x 240 mm			
Color	Grey			
Material	Metal			
EN 54-16 and EN54-4	0033-CPR-075547-1			
Weight	20,5 Kg without batteries			

Total power					
Reference	Without backup amplifier		With backup amplifier		
	Qty of Zone	Total power	Qty of Zone	Total power	
VULCAVOICE 1L	1	300W	NA	NA	
VULCAVOICE 2L	2	400W	1	300W+300W	
VULCAVOICE 3L	3	400W	2	400W+300W	
VULCAVOICE 4L	4	400W	3	400W+300W	

#### Applications:


- Voice Alarm System
- Music
- Messages
- Administrative buildings
- Schools / Institutes
- Cinemas

- Industries
- Museums
- Theatres
- Subway stations
- Tram stations
- Supermarkets





# **Stand alone VACIE**

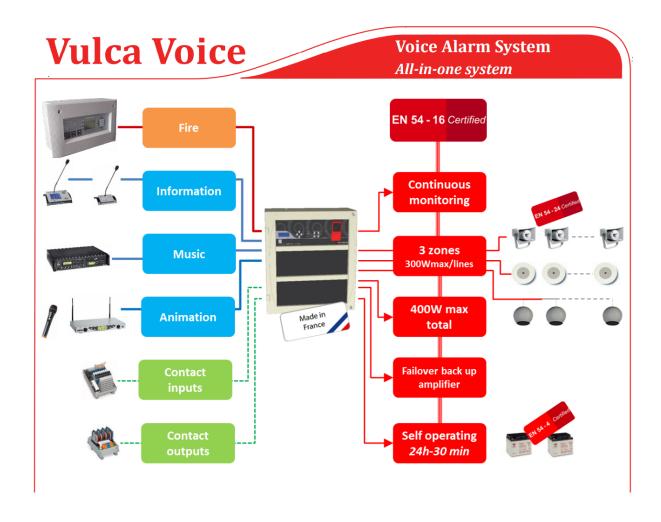

## <u>Reference</u> <u>Description</u>

VULCAVOICE 1L Voice Alarm System 1 zone
VULCAVOICE 2L Voice Alarm System 2 zones
VULCAVOICE 3L Voice Alarm System 3 zones
VULCAVOICE 4L Voice Alarm System 4 zones

RB-6501-EN54 Ceiling loudspeaker 100V-10W EN54-24

KM180-T-EN5424 Hanging loudspeaker (small) 100V-10W 92dBmax/1W/1m EN54-24

Non contractual document

VOICE15T-EN5424 Horn loudspeaker 100V-15W 110dBmax/1W/1m EN54-24 ZR-1110 Volume controller 100V – 10W – Level restauration relay

GX3016 1-16 zones microphone console, daisy chain connection 24Vdc – bus RS485



+33 (0)1 60 13 67 24 +33 (0)1 60 13 67 26 sales@detectomat-int.com

Fax : e-mail :