



4485, 531024-1019, S/EKO F24

Sounders, Flash and beacon



4485: Combined sounder and flash for outdoor use (red color, IP65, 101 db @ 1m, EN54-3 according to CPD)
 Providing an audio-visual warning, 4485 combines the features of an Electronic sounder with a fully integrated Xenon beacon. The result is an attractively designed unit suitable for installation in internal or external locations where a combination of high sound output and visual indication is required, such as elderly people's dwellings and areas with high ambient noise levels.

| | |
|---|--------------------------------------|
| Supply Voltage: 18 to 30Vdc(nominal 24Vdc) | Rated Current: 68mA |
| Sound output at 1m: 101dB | Lamp: Xeno 0,7J |
| Flashlight frequency: 60/min | Material: Thermoplastic (red) |
| Dimensions: (h)121mm x (d) Ø 93mm | Ip rating: 65 |



531024 – 1019: Xenon outdoor beacon high luminosity with 360° angl, from 9Vdc to 60 Vcc, IP65.
 531024 – 1019 have been designed to overcome the problems of high current pulses commonly associated with conventional xenon flash tube units. To eliminate the need for heavy duty power supplies and to prevent fuses failing. 531024 – 1019 is base compatible with 4485 sounder and is suitable for internal or external use. 531024 – 1019 has been designed to complement other products in the range both technically and aesthetically. To provide a high output audio visual unit. The beacon have a built in terminal block for ease of installation. Its lens colour is red.

| | |
|--|--|
| Supply Voltage: 20 to 30Vdc (nominal 24Vdc) | Rated current: 45mA |
| Flashlight frequency: 60/min | Lamp: 0,65 J Xeno |
| Material: Thermoplastic (red) | Dimensions: (h)105mm x (d) Ø 93mm |
| Ip rating: IP65 | Operating temperature: -20°C to +55°C |



S/EKO F24: Self powered outdoor sounder with flash, IP34, 24Vdc. Multi-tone piezoelectric sounder with high acoustic power and high-visibility Xeno flashlight. Its classic and functional aesthetics is suitable for residential, commercial and industrial environments. Available in red for fire systems.


| | |
|--|---|
| Supply Voltage: +24 Vdc | Rated current: 4mA |
| Frequency: 1300 – 2700 Hz | Sound output at 3m: 101dB |
| Battery capacity: 12V, 2.3Ah max. | Dimensions: 200 x 200 x 70 (H x L x D) |
| Weight: 2800g | Operating temperature: -25°C to +55°C |
| IP rating: IP34 | |




4485, 531024-1019, S/EKO F24

Sounders, Flash and beacon


4485

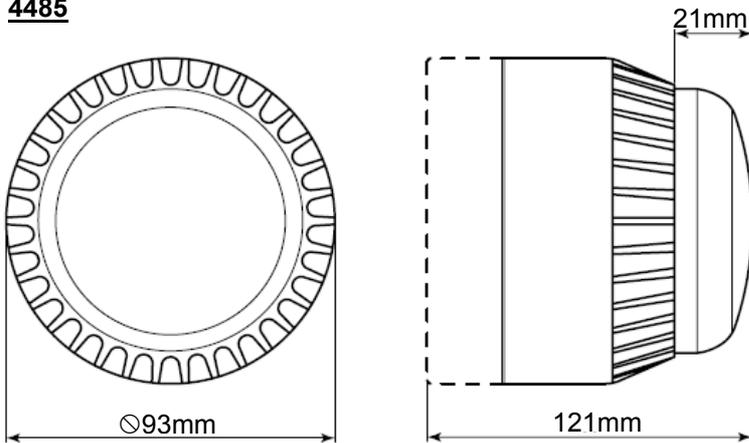


531024 - 1019

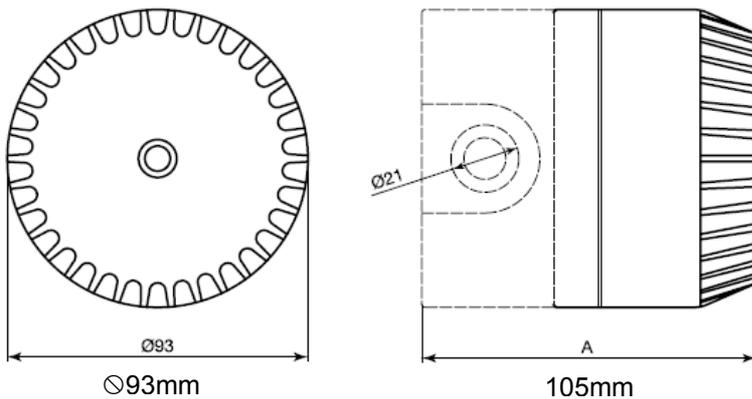

Block connector



S/EKO F24

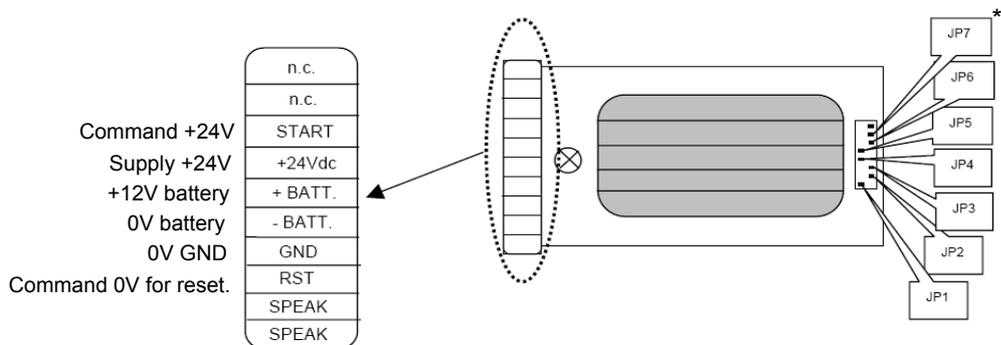

*Jumpers used for audio and visual frequency information

REFERENCE

4485
531024 - 1019
S/EKO F24

DESCRIPTION

Combined sounder and flash for outdoor use
Xenon outdoor beacon high luminosity with 360° angle
Self powered outdoor sounder with flash

