



ALTO-DA1B00X, MARINA-DA3B0X, FENER-2210107X

Information, direction and emergency lighting



ALTO-DA1B00X

Modern design information and direction lighting component. Made of an illuminated, fire resistant acrylic cover on a thin compact casing. And accessorised for easy installation.

The Alto series component has a green led indicator for power supply presence. Ni-Cd battery for 1 to 3 hours operation in emergency status, resistant to high temperature and protected against overcharge and discharge.

Battery	Ni-Cd resistant to high temperature, overcharge and discharge
Ambient temperature	Sustained model: -5°C...+45°C Non maintained: 0°C... +45°C
Operating voltage	230V/50-60Hz +/-10 %
IP index	40



MARINA-DA3B0X

Modern design with rounded corners emergency light. Mounted in a thin compact polycarbon white casing and a transparent polycarbon diffuser and accessorised for easy installation on wall or ceiling.

The Marina series light has a green led indicator for power supply presence Ni-Cd batteries resistant to high temperature and protected against overcharge and discharge.

Battery	Ni-Cd resistant to high temperature, overcharge and discharge
Ambient temperature	Sustained model: -5°C...+45°C Non maintained: 0°C... +45°C
Operating voltage	230V/50-60Hz +/-10 %
Lamp type	T1 6/8W
IP Index	65



FENER-2210107X

Emergency lighting fixture with adjustable spot light, batteries and integrated control circuit. Easily mounted on wall or ceiling. Maintenance free.

Automatically operational when power supply fails. Green, yellow and red led for status indication. Makes the evacuation easy with illuminating exit points in fire incident.

Battery	12V no leakage. Maintenance free, temperature, overcharge and discharge protection.
Ambient temperature	Sustained model: -5°C...+45°C Non maintained: 0°C... +45°C
Operating voltage	230V/50-60Hz +/-10 %
Lamp type	T1 6/8W
IP Index	65




ALTO-DA1B00X, MARINA-DA3B0X, FENER-2210107X

Information, direction and emergency lighting




ALTO-DA1B00X


DA Wall-mounted

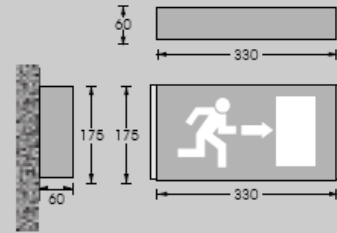


MARINA-DA3B0X

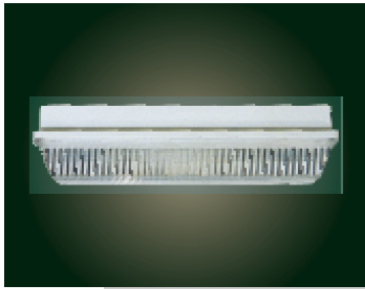

TD Ceiling bracket-mounted

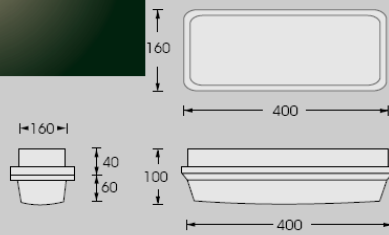

FENER2210107X

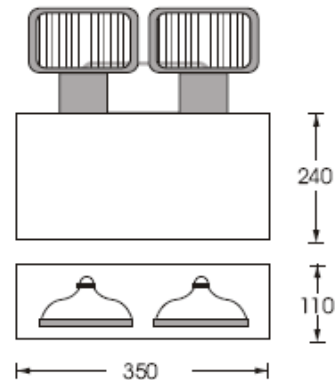

REFERENCE

ALTO-DA1B00X
MARINA-DA3B0X
FENER-2210107X

DESCRIPTION

Information and direction lighting, IP40, sustained double sided 3 hours.
Emergency light non maintained single sided 3 hours (exists also in sustained), IP65.
Emergency light 1 hour(exists also in 3 hours), 2 halogen lamps 20W (exists also in 1), 12V 7Ah battery

